




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H04Q</b>	<b>A2</b>	(11) International Publication Number: <b>WO 00/13432</b> (43) International Publication Date: 9 March 2000 (09.03.00)
(21) International Application Number: PCT/KR99/00502 (22) International Filing Date: 1 September 1999 (01.09.99) (30) Priority Data: 1998/36383 1 September 1998 (01.09.98) KR (71) Applicant: SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-shi, Kyungki-do 442-370 (KR). (72) Inventors: KIM, Jae-Yoel; Sanpon 9-danji Apt. #960, Sanpon 2-dong, Kunpo-shi, Kyonggi-do 435-042 (KR). PARK, Chang-Soo; 72-2, Munjong-dong, Songpa-gu, Seoul 138-200 (KR). (74) Agent: LEE, Keon-Joo; Mihwa Building, 110-2, Myon- gryun-dong 4-ga, Chongro-gu, Seoul 110-524 (KR).		(81) Designated States: AU, CA, CN, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished          upon receipt of that report.</i>

(54) Title: DEVICE AND METHOD FOR TRANSMITTING SUBFRAME IN MOBILE COMMUNICATION SYSTEM

## (57) Abstract

A subframe data transmission device for a mobile communication system. A bit generator generates specific bits having a predetermined value. A bit inserter segments a received data bit stream into at least two subframes, and inserts the generated specific bits at locations where an error probability is higher in the respective subframes. A turbo coder codes the subframe data comprised of the data bit stream and the specific bits. The subframe is equal in size to an ARQ (Automatic Repeat Request) block, and the specific bits are inserted at a rear portion of the subframe. The bit inserter includes a delay for delaying the received data bit stream by the number of the specific bits to be inserted; and a selector for connecting, upon completion of receiving data bits for the subframe, the received data bits to the delay and applying an output of the bit generator to the turbo coder; and applying, when the specific bits are inserted, an output of the delay to the turbo coder.

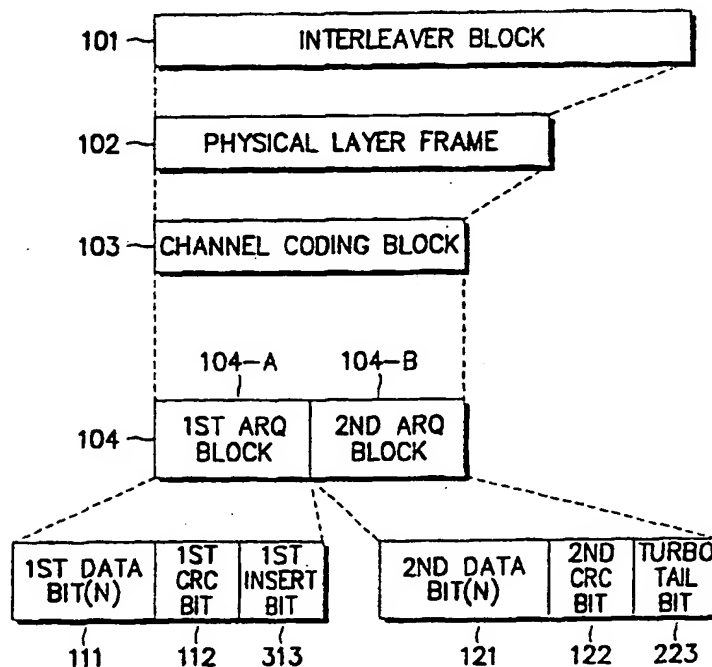

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## **DEVICE AND METHOD FOR TRANSMITTING SUBFRAME IN MOBILE COMMUNICATION SYSTEM**

### **BACKGROUND OF THE INVENTION**

5

#### **1. Field of the Invention**

The present invention relates generally to data communication device and method for a communication system, and in particular, to a frame constructing device and method for transmitting data on a subframe unit basis.

10

#### **2. Description of the Related Art**

As used herein, the term "data bit" refers to uncoded data, and the term "symbol" refers to data coded by a channel coder.

15

In communication systems for processing voice, character, image and video signals, data is generally transmitted on a frame unit basis. A frame is defined as a basic timing interval in the system. In a communication system employing packet switched transmission, throughput represents a ratio of the number of error-free frames to the number of the total received frames. When data is transmitted over a very long frame within a bad channel environment, error frames increase in number, thus reducing the throughput. In addition, the complexity of a receiver is proportional to the number of calculations performed, which is dependent on the length of the received frames. Therefore, in considering the reduced throughput experienced due to channel environment and receiver complexity, a method for dividing a frame into subframes and transmitting data using an ARQ (Automatic Repeat Request) technique is required.

20

25

30

However, a communication system which provides not only a voice service but also various data services, uses a channel coder having different features according to data rates and a service options. In particular, a convolutional coder is typically used for low rate transmission of voice and data, and a turbo coder is typically used for high rate data transmission. Further, in a system for communicating the frame data, a channel encoder for error correction should also encode data on the frame unit basis. In this case, the channel coder adds zero bits

- 2 -

at the tail end of the sequence to indicate the termination of each frame so that a decoder can efficiently decode the frames using that information. An IS-95 system typically uses a non-recursive systemic convolutional coder, which adds a sequence of zero (0) bits to the end of each frame, equal to the number of delays, to implement frame termination.

Meanwhile, a typical turbo coder is comprised of two serial or parallel connected systemic convolutional coders and a turbo interleaver connected between the two systemic convolutional coders. Particularly, in a systemic convolutional coder used for a constituent coder of the turbo coder, termination is not implemented even though a sequence of zero bits are added to input data bits equal to the number of delays, in contrast to the non-recursive systemic convolutional coder. This is because the input data bits are fed back to the delays. The systemic convolutional coder employs a termination method using a feedback value and a method for performing decoding without termination. For more detailed information, see Mark C. Reed and Steven S. Pietrobon, "Turbo-Code Termination Schemes and a Novel Alternative for Short Frames", PIMRC '96, Oct. 15-18, 1996.

A relationship between a signal-to-noise ratio (SNR), and a bit error rate (BER) and a frame error rate (FER) depends on the type of the channel coder. For example, in a turbo coder, SNR required to maintain BER or FER is permitted to be lower, when the frame size (or length) becomes longer. However, in a convolutional coder, SNR required to maintain BER is relatively constant regardless of the frame size, whereas FER increases as the frame increases in size. Therefore, a subframe constructing method for minimizing performance of a communication system which uses two channel coders having different features is required.

It will be assumed herein that a convolutional coder has a constraint length  $K=9$  and a coding rate  $R=1/3$ , and a turbo coder has a constraint length  $K=4$  and a coding rate  $R=1/3$ .

FIG. 1 illustrates a conventional layered frame structure, in which subframes are taken into consideration. Here, a convolutional coder is used for a

- 3 -

channel coder. The frame of FIG. 1 includes 4 layers of an interleaver block 101, a physical layer frame 102, a channel coding block 103 and an ARQ block 104. The interleaver block 101 may include several physical layer frames 102; contrariwise, the physical layer frame 102 may include several interleaver blocks 101. However, it will be assumed herein that one interleaver block 101 constitutes one physical layer frame 102. The physical layer frame 102 may include several channel coding blocks 103, and the channel coding block 103 may include several ARQ blocks 104. Each ARQ block 104 is comprised of data bits and zero (0) bits. For better understanding, a description will be made with reference to a case where a data rate of 38.4Kbps is used. Hereinafter, it will be assumed that a CRC (Cyclic Redundancy Code) is comprised of 16 bits.

When the ARQ block 104 is a single ARQ block, the ARQ block 104 includes N (=744) data bits, 16 CRC bits and 8 tail bits, so that the frame is comprised of 768 bits in total. However, when the ARQ block 104 is comprised of two subblocks of first and second ARQ blocks 104-A and 104-B, the first ARQ block 104-A includes 360 first data bits 111, 16 first CRC bits 112 and 8 first additional bits 113, and the second ARQ block 104-B includes 360 second data bits 121, 16 second CRC bits 122 and 8 convolutional tail bits 123, so that the frame is comprised of 768 bits in total. However, in either case, the number of data bits input to the channel coding block 103 is fixed to 768, and the number of channel coded symbols for the 768 data bits becomes  $768 \times 3 = 2304$ . In the case where the ARQ block 104 is comprised of the first and second ARQ blocks 104-A and 104-B, the frame additionally includes the 16 first CRC bits 112 and the 8 first additional bits 113, undesirably causing an increase in overhead. However, it is advantageous in that retransmission can be performed using the ARQ. In addition, when the first additional bits 113 are comprised of 8 zero bits, these first additional bits 113 can be used as tail bits for termination of the first ARQ block 104-A.

Herein, the additional bits are comprised of 8 consecutive zero bits, and the number of the additional bits can be varied. As illustrated in FIG. 1, when a convolutional coder is used, the first additional bits 113 can be used for termination of the first ARQ block 104-A. Even in the case where the ARQ block 104 is comprised of several sub-ARQ blocks 104-A and 104-B, the additional bits can be used for termination. Since the first and second ARQ blocks 104-A and

- 4 -

104-B are independently terminated, it is possible to simultaneously decode the two sub ARQ blocks in parallel at a receiver. That is, in the convolutional coder, even though the subframe structure is used, the channel coding block and the ARQ block can be equal in size to each other because of the additional bits.

5

FIG. 2 illustrates another conventional layered frame structure, in which subframes are taken into consideration. Here, a turbo coder is used for a channel coder. In the frame of FIG. 2, turbo tail bits 223 are comprised of 8 bits, values of which are not consecutive zero bits but are varied according to feedback values from a recursive convolutional coder constituting the turbo coder. In FIG. 2, since a turbo interleaver existing in a channel coding block 103 performs turbo coding after scrambling the data of the whole ARQ block 104, it is not possible to independently decode the sub ARQ blocks as in FIG. 1. That is, in the turbo coder, even though the ARQ block 104 is comprised of several sub ARQ blocks, decoding should be performed at a time for the whole ARQ block to decode the data for each sub ARQ block. In this case, although the ARQ block 104 is segmented into sub ARQ blocks 104-A and 104-B, it is not possible to simultaneously decode the sub ARQ blocks in parallel as in the convolutional coder.

10  
15  
20

Therefore, in a mobile communication system using the turbo coder, it is preferable to maximize performance of the turbo coder by adding the benefits of the convolutional coder, in considering a subframe constructing method for ARQ transmission.

25

### SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a device and method for constructing transmission frames in a subframe unit suitable for transmitting data in a mobile communication system using a turbo coder.

30

It is another object of the present invention to provide a device and method for constructing a layered frame in which subframes are taken into consideration, wherein predetermined specific bits are inserted at locations where error probability is higher in the frame before coding, in a mobile communication

35

- 5 -

system.

5 It is a further object of the present invention to provide a device and method for constructing transmission frames in a subframe unit suitable for transmitting data, inserting predetermined specific bits at locations where error probability is higher in the subframe before coding, and then transmitting the coded frame data, in a mobile communication system using a turbo coder.

10 To achieve the above objects, there is provided a subframe data transmission device for a mobile communication system. A bit generator generates specific bits having a predetermined value. A bit inserter segments a received data bit stream into at least two subframes, and inserts the generated specific bits at locations where an error probability is higher in the respective subframes. A turbo  
15 coder codes the subframe data comprised of the data bit stream and the specific bits. The subframe is equal in size to an ARQ (Automatic Repeat Request) block, and the specific bits are inserted at a rear portion of the subframe.

The bit inserter comprises a delay for delaying the received data bit stream by the number of the specific bits to be inserted; and a selector for connecting,  
20 upon completion of receiving data bits for the subframe, the received data bits to the delay and applying an output of the bit generator to the turbo coder; and applying, when the specific bits are inserted, an output of the delay to the turbo coder.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

30 FIG. 1 is a diagram illustrating a layered frame structure, in which subframes are taken into consideration, for a conventional mobile communication system using a convolutional coder;

FIG. 2 is a diagram illustrating a layered frame structure, in which subframes are taken into consideration, for a conventional mobile communication  
35 system using a turbo coder;

- 6 -

FIG. 3 is a diagram illustrating a layered frame structure, in which subframes are taken into consideration, for a mobile communication system using a turbo coder according to an embodiment of the present invention;

5 FIG. 4 is a diagram illustrating a layered frame structure, in which subframes are taken into consideration, for a mobile communication system using a turbo coder according to an embodiment of the present invention, wherein the turbo coder does not perform termination using turbo tail bits;

10 FIG. 5 is a diagram illustrating a layered frame structure, in which subframes are taken into consideration, for a mobile communication system using a turbo coder according to an embodiment of the present invention, wherein CRC bits are not used;

15 FIG. 6 is a diagram illustrating a layered frame structure, in which subframes are taken into consideration, for a mobile communication system using a turbo coder according to an embodiment of the present invention, wherein turbo tail bits and CRC bits are not used;

FIGS. 7A and 7B are frequency diagrams illustrating simulation results for performance with respect to the number of insert bits in a layered frame structure in which subframes are taken into consideration, in a mobile communication system using a turbo coder according to an embodiment of the present invention;

20 FIG. 8 is a block diagram illustrating a channel coding device according to a first embodiment of the present invention, for the layered structure of FIG. 3;

FIG. 9 is a block diagram illustrating a channel coding device according to a second embodiment of the present invention, for the layered structure of FIG. 4;

25 FIG. 10 is a block diagram illustrating a channel coding device according to a third embodiment of the present invention, for the layered structure of FIG. 3;

FIG. 11 is a block diagram illustrating a channel coding device according to a fourth embodiment of the present invention, for the layered structure of FIG. 3;

30 FIG. 12 is a timing diagram illustrating operation timing of a turbo coder according to the first embodiment of FIG. 8;

FIG. 13 is a timing diagram illustrating operation timing of a turbo coder according to the second embodiment of FIG. 9;

FIG. 14 is a timing diagram illustrating operation timing of a turbo coder according to the third embodiment of FIG. 10; and

35 FIG. 15 is a timing diagram illustrating operation timing of a turbo coder



according to the fourth embodiment of FIG. 11;

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

5 Preferred embodiments of the present invention will be described herein below with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

10 FIG. 3 illustrates a layered frame structure, in which subframes are taken into consideration, according to a first embodiment of the present invention. Here, a turbo coder is used for a channel coder.

15 In a first embodiment of FIG. 3, predetermined specific bits are inserted at the locations where error probability is relatively higher in a frame of an ARQ block 104. The error probability is determined by way of experiment, and the insert locations should be known to both the channel coder and a channel decoder. If the locations and values of the bits inserted are known to both the receiving party and transmitting party, the specific bits are insignificant no matter whether  
20 they are transmitted or not. In addition, in case that the transmitting party and the receiving party predetermined with each other utilize the control information bit as the inserting bit, the inserting bit can be used for the specific bits. In this case, the specific bits should be transmitted.

25 It will be assumed herein that the specific bits to be inserted have a value "0" and the specific bits inserted after coding in a turbo coder are not transmitted. In addition, the inserted specific bits will be referred to as "insert bits".

30 The turbo coder is comprised of a part for outputting input data bits, as they are, and a part for outputting parities. Since the data bit outputting part punctures specific bits positioned at predetermined insert locations, it is allowable not to transmit the insert bits. However, on the contrary, the insert bits may have a value "1" and it is also allowable to transmit the insert bits after turbo coding. In addition, FER performance may depend on the number of the insert bits. That is, it  
35 is apparent that FER performance is improved (i.e., FER is decreased), when the

- 8 -

insert bits increase in number.

In the meantime, the additional bits of FIGs. 1 and 2 are consecutively added bits, whereas the insert bits can be either the consecutively added bits or the bits dispersedly distributed in the whole ARQ frame. This is because there is no necessity for consecutively transmitting the insert bits, since the turbo coder codes the whole ARQ frame at a time, although in the convolutional coder, the additional bits should be consecutively transmitted in a quantity equal to the number of delays so that the additional bits can be used for termination of the subframe.

In the first embodiment, it is assumed that the frame has a data rate of 38.4Kbps as in FIG. 1. In FIG. 3, first and second data bits 111 and 121 are comprised of 360 bits; first and second CRC bits 112 and 122 are comprised of 16 bits; first insert bits 313 total 12 bits; and turbo tail bits 223 total 8 bits. Thus, the frame is comprised of 772 bits in total and the number of channel coded symbols becomes  $772 \times 3 = 2316$ . That is, the number of the first insert bits is greater than the number of the additional bits shown in FIG. 1 by 4. However, when the channel coded symbols are punctured in a quantity equal to the number of insert bits, the quantity of final symbols output from the turbo coder becomes  $2316 - 12 = 2304$ . In addition, as described above, since the insert bits are inserted at locations previously scheduled with the receiving party with predetermined values, it is allowable not to transmit the insert bits after channel coding by the transmitting party. In this case, it is possible to obtain a rate matching effect by puncturing the insert bits. Therefore, the number of the final symbols output from the channel coder can be identical to or smaller than the number of the symbols shown in FIG. 1.

FIG. 4 illustrates a layered frame structure, in which subframes are taken into consideration, according to a second embodiment of the present invention. In this embodiment, a turbo coder, which is used as a channel coder, does not perform termination using the turbo tail bits. This is because the turbo decoder can perform decoding even without termination. For more information, please see Mark C. Reed and Steven S. Pietrobon, "Turbo-Code Termination Schemes and a Novel Alternative for Short Frames", PIMRC '96, Oct. 15-18, 1996.

Referring to FIG. 4, second insert bits 423 are inserted to compensate for performance degradation caused by non-termination of the ARQ frame. Like the first insert bits 313, the second insert bits 423 are predetermined specific bits inserted at the locations where error probability is relatively higher in the whole ARQ block 104. The error probability for inserting the second insert bits is determined by way of experiment, and the insert locations should be known to both the channel coder and a channel decoder. If the locations and values of the insert bits are known to both a receiving party and a transmission party, the specific bits are insignificant no matter whether they are transmitted or not. In addition, separate data bits other than the coded bits, previously scheduled with the receiving party, can be used for the specific bits. In this case, the specific bits are transmitted, as they are. It will be assumed herein that specific values of the second insert bits are "0"s and the specific bits of the turbo coder after turbo coding are not transmitted.

FIG. 5 illustrates a layered frame structure, in which subframes are taken into consideration, according to a third embodiment of the present invention. In this embodiment, a turbo coder, which is used for a channel coder, does not use CRC bits.

Referring to FIG. 5, the turbo coder performs termination using turbo tail bits. In the turbo coder, since channel coding is performed not in a unit of the whole ARQ frame 104 but in a unit of subframe, it is possible to remove the CRC bits to increase throughput and performance of the channel coder. That is, in the convolutional coder, when an ARQ frame is divided into sub ARQ frames before transmission using additional bits comprised of 8 zero bits, a receiving party can perform decoding in a unit of sub ARQ frame. However, since the turbo coder can perform decoding in a unit of the whole ARQ frame, it is possible to increase throughput or improve performance of the turbo coder by removing the CRC bits from the subframes for the convolutional coder and then either transmitting more data bits or increasing the quantity of insert bits to equal the quantity of the CRC bits. In FIG. 5, first data bits 511 and second data bits 521 can increase in quantity to equal the quantity of the CRC bits shown in FIGs. 3 and 4. Alternatively, it is also possible to improve performance of the turbo coder by increasing the quantity of first insert bits 513 to twice that of the CRC bits.

FIG. 6 illustrates a layered frame structure, in which subframes are taken into consideration, according to a fourth embodiment of the present invention. In this embodiment, a turbo coder, which is used for a channel coder, does not use tail bits or CRC bits.

Referring to FIG. 6, the turbo coder does not perform termination using the turbo tail bits and adds second insert bits. In the frame structure of FIG. 6, it is possible to improve throughput by removing CRC bits and then increasing first and second data bits 511 and 521 to equal the quantity of the CRC bits. Alternatively, it is also possible to improve performance of the turbo coder by increasing the quantity of the first insert bits 513 to twice of the CRC bits.

FIG. 7A illustrates a simulation result for performance with respect to the number of insert bits in a mobile communication system using a layered frame structure according to the first embodiment of the present invention. Simulation conditions are as follows:

- Channel Model: ITU-R Rec. M. 1225 Channel-B
- Carrier Frequency: 2GHz
- Mobile Speed: 3km/h, 30km/h, 60km/h, 120km/h
- Information Bit Rate: 32kbps(10ms)
- Chip Rate = 4.096 Mcps
- Ideal Channel Estimation
- Diversity: 2-branch space diversity
- RAKE: 2 fingers per branch
- SIR based TPC(dynamic range 12dB, step size 1dB)
- Turbo Code: K=3 with polynomial(7,5), MAP decoder with 8 iterations and 8-bit quantization

It is noted that an SNR value required to maintain FER performance of  $10^{-3}$  becomes lower, when the insert bits increase in number. Therefore, to maximize performance of the turbo coder, it is preferable to maximize the number of the insert bits and then puncture the insert bits from channel coded symbols.

FIG. 7B illustrates a simulation result for performance with respect to the number of insert bits in a mobile communication system using a layered frame structure according to the second embodiment of FIG. 4. Although simulation conditions are the same as in FIG. 7A, the turbo coder has added the second insert bits without performing termination using the turbo tail bits. It can be noted from FIG. 7B that an SNR value required to maintain FER performance of  $10^{-3}$  becomes lower, when the insert bits increase in number.

Now, a reference will be made to operation of the channel coders according to the first through fourth embodiments.

FIG. 8 illustrates a channel coding device for a layered frame structure of FIG. 3 according to the first embodiment of the present invention. FIG. 12 illustrates operation of the channel coder of FIG. 8, which codes data having a subframe structure according to the first embodiment. Therefore, it can be understood that the channel coder of FIG. 8 generates and transmits data having the frame structure of FIG. 3 according to the first embodiment. FIG. 12 is a timing diagram illustrating the procedure for generating data having the subframe structure according to the first embodiment, wherein an X-axis represents operation of switches 880, 881 and 882, and a Y-axis, being a time axis, represents timing of the bits output from the above switches.

Referring to FIGs. 8 and 12, upon receipt of input bits  $I_k$ , a switch 880 connects the input bits to a line 801 and a switch 881 connects the line 801 to a line 802 to apply first data bits to the line 802, as shown by reference numeral 1211 of FIG. 12. At this point, a switch 882 connects the line 802 to a line 803 to apply the first data bits on the line 803 to a coder, and a CRC generator 820 receiving the first data bits on the line 802 generates CRC bits. In this state, all the 360 first data bits 111 of FIG. 3 are input to the CRC generator 820, which generates CRC bits for the first data bits.

Thereafter, when the first data bits are completely input, the switch 880 is connected to a delay 810 and the switch 881 is disconnected or remains disconnected from the delay 810 for a while to shut off an input to the line 802, so that the second data bits, being subsequent input bits, are stored in the delay 810,

- 12 -

as shown by reference numeral 1213 of FIG. 12. Further, when the switch 882 is connected to the CRC generator 820, the CRC generator 820 outputs 16 CRC bits for the first data bits and applies them to the coder through the switch 882. When the CRC bits are completely applied to the coder, the switch 882 is connected to a  
5 bit generator 830 to provide first insert bits 313, which are predetermined known bits, to the coder through it, as shown by reference numeral 1215 of FIG. 12.

After completion of the process for the first data bits, the switch 881 is connected to the delay 810 while the switch 880 maintains a connection to the  
10 delay 810, to provide the second data bits stored in the delay 810 to the line 802 as shown by reference numeral 1217 of FIG. 12. At this point, the switch 882 is connected to the line 802 to apply the second data bits to the coder, and the second data bits on the line 802 are also applied to the CRC generator 820, which calculates CRC bits for the second data bits.

15 Thereafter, when the second data bits are completely input, the switch 882 is connected to the CRC generator 820 to provide 16 CRC bits for the second data bits, output from the CRC generator 820, to the coder through it as shown by reference numeral 1219 of FIG. 12. When the first data bits, the first CRC bits, the  
20 second data bits and the second CRC bits are completely input to the coder part in such a manner, the coder part initiates a coding process for the input bits.

The coder is comprised of a first constituent coder 850, an interleaver 840, a second constituent coder 860 and a multiplexer 870. The first and second  
25 constituent coders 850 and 860 according to the first embodiment, insert bits and add tail bits to perform termination. The signals input to the coder are commonly provided to the multiplexer 870, the first constituent coder 850 and the interleaver 840. Further, interleaved input bits output from the interleaver 840 are applied to the second constituent coder 860. Here, the first and second constituent coders 850  
30 and 860 are recursive systemic constituent coders, which generate the tail bits to be added.

In operation, the first constituent coder 850 codes the input bits and generates coded bits for the tail bits for termination. The first constituent coder 850  
35 outputs first parity bits for the input bits and the tail bits, and provides the output

- 13 -

bits to the multiplexer 870. The interleaver 840 interleaves the bits input to the coder and provides the interleaved bits to the second constituent coder 860, which codes the interleaved data bits in the same manner as in the first constituent coder 850 to generate second parity bits and tail bits. The second parity bits and tail bits  
5 output from the second constituent coder 860 are also applied to the multiplexer 870. The multiplexer 870 then punctures the data bits  $I_k$  to insert therein the insert bits.

Operation of such a coder is disclosed in detail in Korean patent  
10 application No. 1998-13956, entitled "Channel Coding Device and Method for Communication System", filed by the applicant.

In the decoding process, outputs of the multiplexer 870 are demultiplexed and specific bits are inserted at the insert locations where the insert bits are  
15 inserted. Such a channel decoder is disclosed in detail in Korean patent application No. 1998-32471, filed by the applicant. In the second through fourth embodiments described hereafter, the decoder will decode the coded data in the same manner as stated above.

FIG. 9 illustrates a channel coding device for a layered frame structure of  
20 FIG. 4 according to the second embodiment of the present invention. FIG. 13 illustrates operation of the channel coder of FIG. 9, which codes data having a subframe structure according to the second embodiment. Therefore, it can be understood that the channel coder of FIG. 9 generates and transmits data having  
25 the frame structure of FIG. 4 according to the second embodiment. FIG. 13 is a timing diagram illustrating the procedure for generating data having the subframe structure according to the second embodiment, wherein an X-axis represents operation of switches 980, 981 and 982, and an Y-axis, being a time axis, represents timing of the bits output from the above switches.

Referring to FIGs. 9 and 13, upon receipt of input bits  $I_k$ , a switch 980  
30 connects the input bits to a line 901 and a switch 981 connects the line 901 to a line 902 to apply first data bits to the line 902, as shown by reference numeral 1311 of FIG. 13. At this point, a switch 982 connects the line 902 to a line 903 to  
35 apply the first data bits on the line 903 in common to a coder and a CRC generator

920. While the 360 first data bits 111 of FIG. 4 are completely input, the CRC generator 920 calculates CRC bits for the first data bits.

5        Thereafter, when the first data bits are completely input, the switch 980 is connected to a delay 910 and the switch 981 is disconnected or remains disconnected from the delay 910 for a while to shut off an input to the line 902, so that the second data bits, being subsequent input bits, are stored in the delay 910, as shown by reference numeral 1313 of FIG. 13. Further, when the switch 982 is connected to the CRC generator 920, the CRC generator 920 outputs 16 CRC bits for the first data bits and applies them to the coder through the switch 982. When the CRC bits are completely applied to the coder, the switch 982 is connected to a bit generator 930 to provide first insert bits 313, which are predetermined known bits, to the coder through it, as shown by reference numeral 1315 of FIG. 13.

15        After completion of the process for the first data bits, the switch 981 is connected to the delay 910 while the switch 980 maintains a connection to the delay 910, to provide the second data bits stored in the delay 910 to the line 902 as shown by reference numeral 1317 of FIG. 13. At this point, the switch 982 is connected to the line 902 to apply the second data bits to the coder, and the second data bits on the line 902 are also applied to the CRC generator 920, which calculates CRC bits for the second data bits.

25        Thereafter, when the second data bits are completely input, the switch 982 is connected to the CRC generator 920 to provide 16 CRC bits for the second data bits, output from the CRC generator 920, to the coder through it as shown by reference numeral 1319 of FIG. 13. When the CRC bits are completely applied to the coder, the switch 982 is connected to the bit generator 930 to provide second insert bits 413, which are predetermined known bits, to the coder through it, as shown by reference numeral 1321 of FIG. 13.

30        When the first data bits, the first CRC bits, the second data bits and the second CRC bits are completely input to the coder part in such a manner, the coder part initiates a coding process for the input bits having the subframe structure of FIG. 4.

35



- 15 -

The coder is comprised of a first constituent coder 950, an interleaver 940, a second constituent coder 960 and a multiplexer 970. The first and second constituent coders 950 and 960 according to the second embodiment, do not perform termination. The signals input to the coder are commonly provided to the multiplexer 970, the first constituent coder 950 and the interleaver 940. Further, interleaved input bits output from the interleaver 940 are applied to the second constituent coder 960. Here, the first and second constituent coders 950 and 960 are recursive systemic constituent coders, which do not generate the tail bits for termination.

In operation, the first constituent coder 950 codes the input bits and provides the coded bits to the multiplexer 970. The interleaver 940 interleaves the bits input to the coder and provides the interleaved bits to the second constituent coder 960, which codes the interleaved data bits in the same manner as in the first constituent coder 950 to generate second parity bits. The second parity bits output from the second constituent coder 960 are also applied to the multiplexer 970. The multiplexer 970 then punctures the data bits  $I_k$  to insert therein the insert bits.

FIG. 10 illustrates a channel coding device for a layered frame structure of FIG. 5 according to the third embodiment of the present invention. FIG. 14 illustrates operation of the channel coder of FIG. 10, which codes data having a subframe structure according to the third embodiment. Therefore, it can be understood that the channel coder of FIG. 10 generates and transmits data having the frame structure of FIG. 5 according to the third embodiment. FIG. 14 is a timing diagram illustrating the procedure for generating data having the subframe structure according to the third embodiment, wherein an X-axis represents operation of switches 1080, 1081 and 1082, and an Y-axis, being a time axis, represents timing of the bits output from the above switches.

Referring to FIGs. 10 and 14, upon receipt of input bits  $I_k$ , a switch 1080 connects the input bits to a line 1002 to apply first data bits to the line 1002, as shown by reference numeral 1411 of FIG. 14. At this point, a switch 1082 connects the line 1002 to a line 1003 to apply the first data bits on the line 1002 to a coder. When the first data bits are completely applied to the coder, the switch 1082 is connected to a bit generator 1030 to provide first insert bits 513, which are

predetermined known bits, to the coder through it, as shown by reference numeral 1413 of FIG. 14.

5 After completion of the process for the first data bits, the switch 1080 is connected to a delay 1010 to store second data bits 521 in the delay 1010, and the switch 1082 is connected to the delay 1010 to provide the second data bits 521 stored in the delay 1010 to the line 1003 as shown by reference numeral 1415 of FIG. 14. Thereafter, the switch 1082 is connected again to the line 1002 to apply the second data bits on the line 1002 to the coder. When the first data bits, the first  
10 insert bits and the second data bits are completely input to the coder in such a manner, the coder initiates a coding process for the input bits.

The coder is comprised of a first constituent coder 1050, an interleaver 1040, a second constituent coder 1060 and a multiplexer 1070. The first and  
15 second constituent coders 1050 and 1060 according to the third embodiment, insert bits and add tail bits to perform termination. The signals input to the coder are commonly provided to the multiplexer 1070, the first constituent coder 1050 and the interleaver 1040. Further, interleaved input bits output from the interleaver 1040 are applied to the second constituent coder 1060. Here, the first and second  
20 constituent coders 1050 and 1060 are recursive systemic constituent coders, which generate the tail bits for termination.

In operation, the first constituent coder 1050 codes the input bits and generates coded bits for the tail bits for termination. The first constituent coder  
25 1050 outputs the first parity bits for the input bits and the tail bits, and provides the output bits to the multiplexer 1070. The interleaver 1040 interleaves the bits input to the coder and provides the interleaved bits to the second constituent coder 1060, which codes the interleaved data bits in the same manner as in the first constituent coder 1050 to generate second parity bits. The second parity bits output from the  
30 second constituent coder 1060 are also applied to the multiplexer 1070. The multiplexer 1070 then punctures the data bits  $1k$  to insert therein the insert bits.

FIG. 11 illustrates a channel coding device for a layered frame structure of FIG. 6 according to the fourth embodiment of the present invention. FIG. 15  
35 illustrates operation of the channel coder of FIG. 11, which codes data having a

subframe structure according to the fourth embodiment. Therefore, it can be understood that the channel coder of FIG. 11 generates and transmits data having the frame structure of FIG. 6 according to the fourth embodiment. FIG. 15 is a timing diagram illustrating the procedure for generating data having the subframe structure according to the fourth embodiment, wherein an X-axis represents operation of switches 1180, 1181 and 1182, and an Y-axis, being a time axis, represents timing of the bits output from the above switches.

Referring to FIGs. 11 and 15, upon receipt of input bits  $I_k$ , a switch 1180 connects the input bits to a line 1102 to apply first data bits to the line 1102, as shown by reference numeral 1511 of FIG. 15. At this point, a switch 1182 connects the line 1102 to a line 1103 to apply the first data bits on the line 1102 to a coder. When the first data bits are completely applied to the coder, the switch 1182 is connected to a bit generator 1130 to provide first insert bits 513, which are predetermined known bits, to the coder through it, as shown by reference numeral 1513 of FIG. 15.

After completion of the process for the first data bits, the switch 1180 is connected to a delay 1110 to store second data bits 521 in the delay 1110, and the switch 1182 is connected to the delay 1110 to provide the second data bits 521 stored in the delay 1110 to the line 1103 as shown by reference numeral 1515 of FIG. 15. Thereafter, the switch 1182 is connected again to the line 1102 to apply the second data bits on the line 1102 to the coder. When the first data bits, the first insert bits and the second data bits are completely input to the coder in such a manner, the coder initiates a coding process for the input bits.

The coder is comprised of a first constituent coder 1150, an interleaver 1140, a second constituent coder 1160 and a multiplexer 1170. The first and second constituent coders 1150 and 1160 according to the third embodiment, do not perform termination. The signals input to the coder are commonly provided to the multiplexer 1170, the first constituent coder 1150 and the interleaver 1140. Further, interleaved input bits output from the interleaver 1140 are applied to the second constituent coder 1160. Here, the first and second constituent coders 1150 and 1160 are recursive systemic constituent coders, which do not generate the tail bits for termination.

- 18 -

5 In operation, the first constituent coder 1150 codes the input bits to generate first parity bits and provides the coded bits (i.e., the first parity bits) to the multiplexer 1170. The interleaver 1140 interleaves the bits input to the coder and provides the interleaved bits to the second constituent coder 1160, which codes the interleaved data bits in the same manner as in the first constituent coder 1150 to generate second parity bits. The second parity bits output from the second constituent coder 1160 are also applied to the multiplexer 1170. The multiplexer 1170 then punctures the data bits  $1k$  to insert therein the insert bits.

10 In sum, predetermined specific bits are inserted at the locations where an error probability is relatively higher in a whole ARQ block before channel coding. The error probability is determined by way of experiment. Since the insert locations are previously known to both the channel coder and the channel decoder, 15 the turbo coder does not transmit the insert bits. Therefore, in the novel subframe structure, the FER performance depends on the number of the insert bits. That is, the FER performance is improved, when the insert bits increase in number.

20 While the invention has been shown and described with reference to a certain preferred embodiment thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

**CLAIMS:**

1. A subframe data transmission device for a mobile communication system, comprising:
  - 5 a bit generator for generating specific bits having a predetermined value;
  - a bit inserter for segmenting a received data bit stream into at least two subframes, and inserting the generated specific bits at locations where an error probability is higher in the respective subframes; and
  - 10 a turbo coder for coding the subframe data comprised of the data bit stream and the specific bits.
2. The subframe data transmission device as claimed in claim 1, wherein the subframe is equal in size to an ARQ (Automatic Repeat Request) block, and the specific bits are inserted at a rear portion of the subframe.
- 15 3. The subframe data transmission device as claimed in claim 1, wherein the bit inserter comprises:
  - a delay for delaying the received data bit stream by the number of the specific bits to be inserted; and
  - 20 a selector for connecting, upon completion of receiving data bits for the subframe, the received data bits to the delay and applying an output of the bit generator to the turbo coder; and applying, when the specific bits are inserted, an output of the delay to the turbo coder.
- 25 4. A subframe data transmission method for a mobile communication system, comprising the steps of:
  - generating specific bits having a predetermined value;
  - segmenting a received data bit stream into subframes, and inserting the generated specific bits in the subframes at predetermined locations; and
  - 30 coding the subframes in which the specific bits are inserted.
5. The subframe data transmission method as claimed in claim 4, wherein the subframe is equal in size to an ARQ (Automatic Repeat Request) block, and the specific bits are inserted at a rear portion of the subframe.

- 20 -

6. The subframe data transmission method as claimed in claim 4, wherein the bit inserting step comprises the steps of:

upon completion of receiving data bits for the subframe, inserting the generated specific bits and delaying the received data bits; and

5 outputting the delayed data bits, when the specific bits are inserted.

7. The subframe data transmission device as claimed in claim 1, wherein the turbo coder is comprised of:


10 a first constituent coder, being a recursive systemic constituent coder, for coding the subframe data;

an interleaver for interleaving the subframe data;


a second constituent coder, being a recursive systemic constituent coder, for receiving the interleaved subframe data from the interleaver and coding the interleaved subframe data; and

15 a multiplexer for receiving the subframe data, the coded subframe data, and the interleaved coded subframe data and puncturing the sub frame data to insert bits therein.

1/16

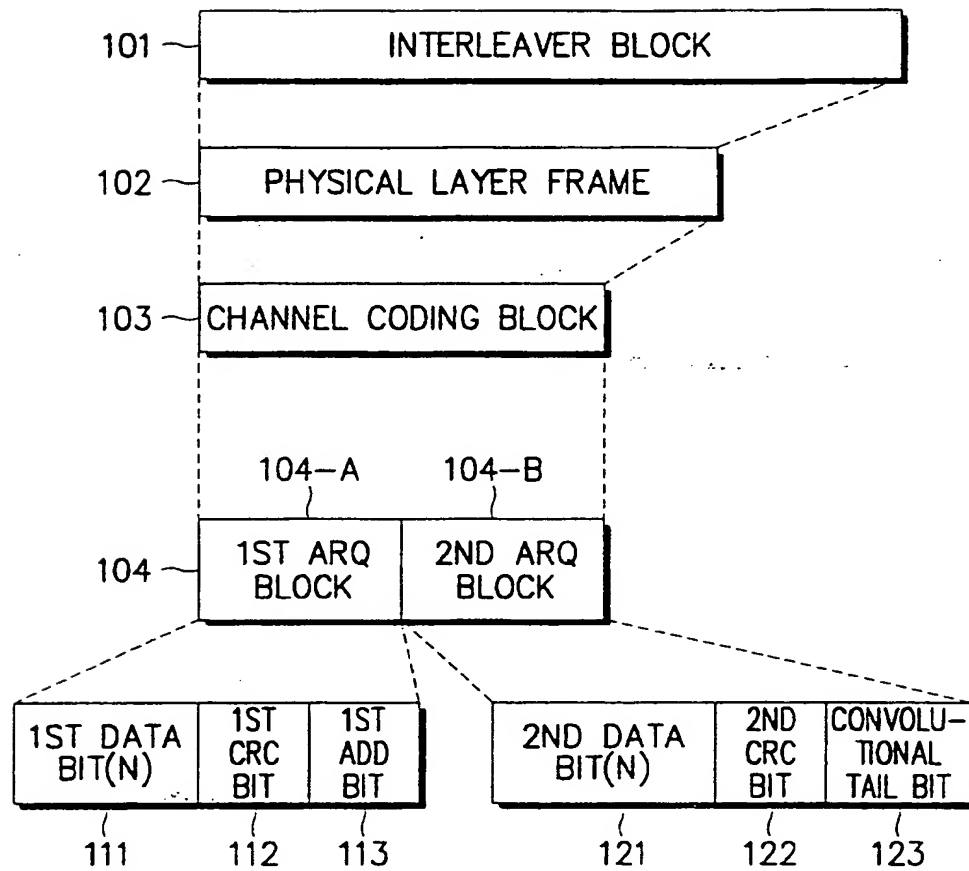

(PRIOR ART)  
FIG. 1

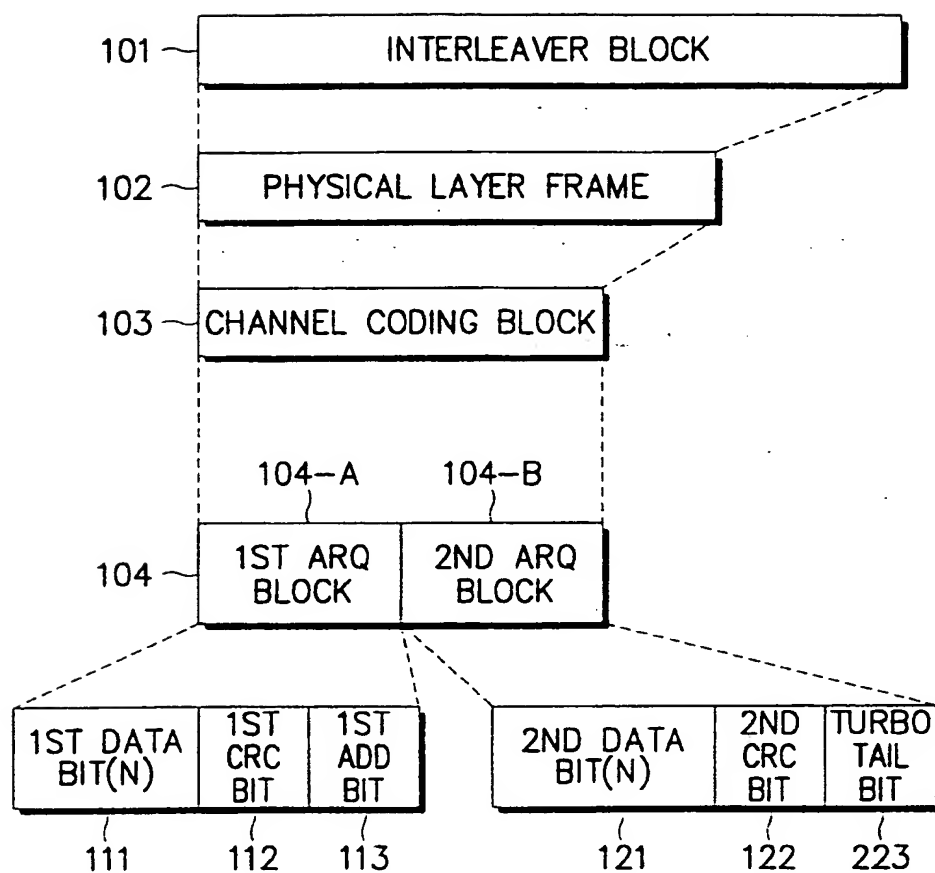

(PRIOR ART)  
FIG. 2



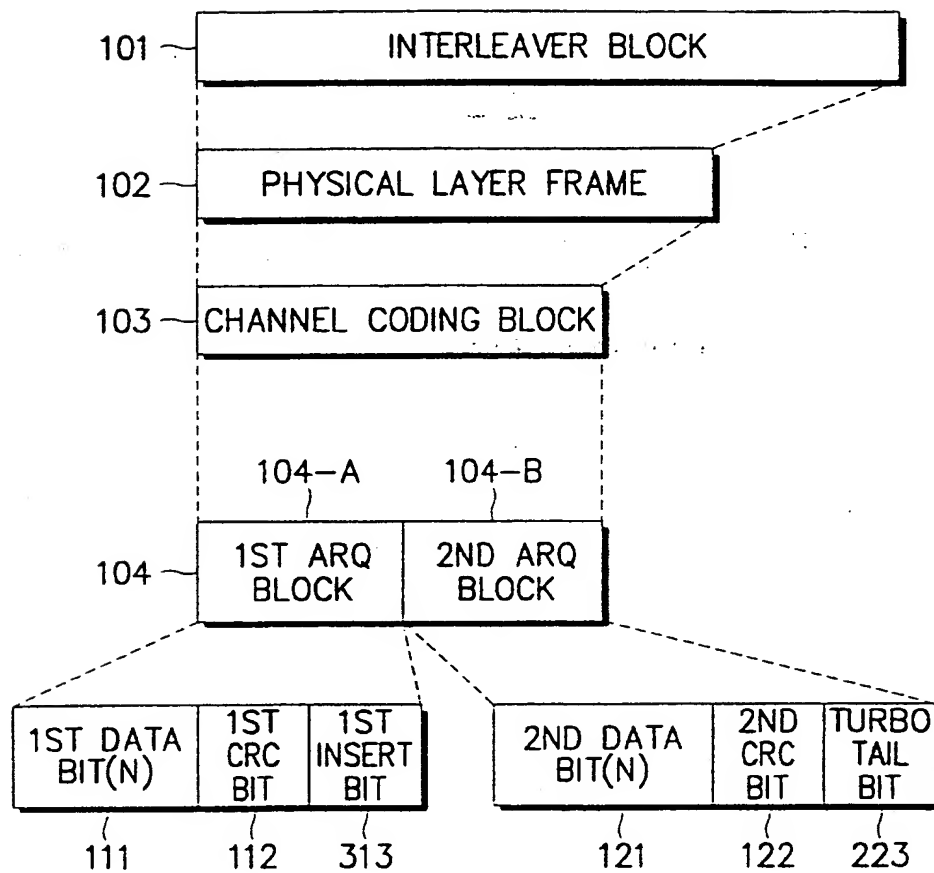


FIG. 3

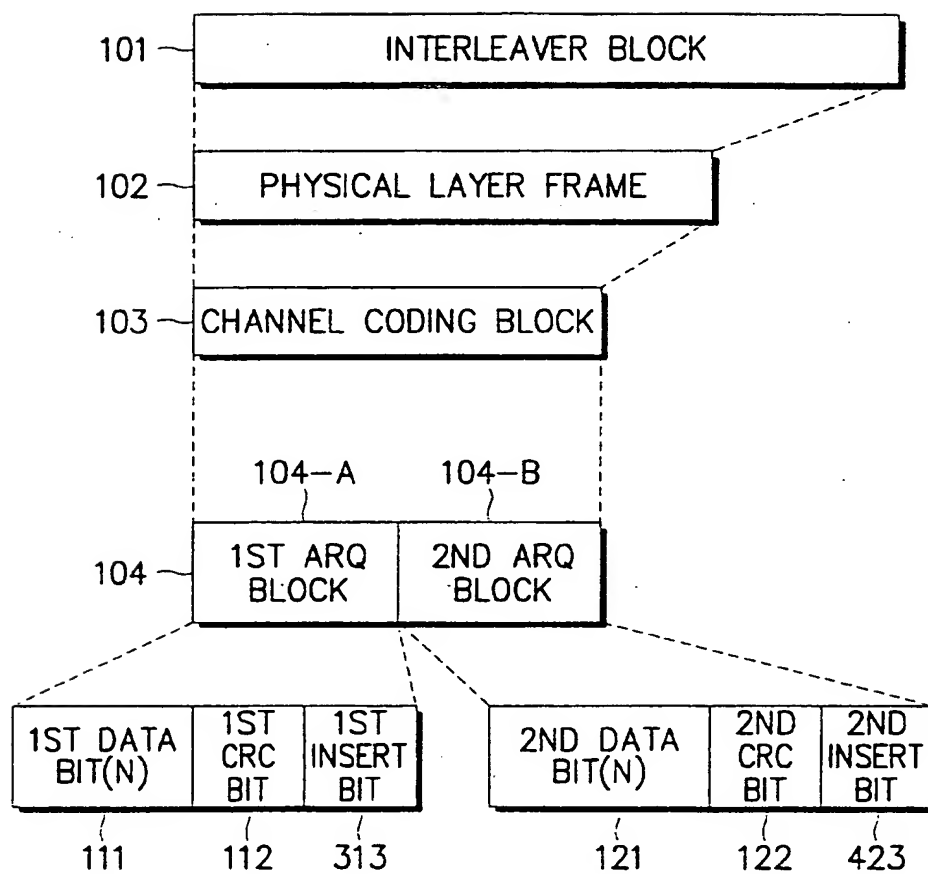


FIG. 4

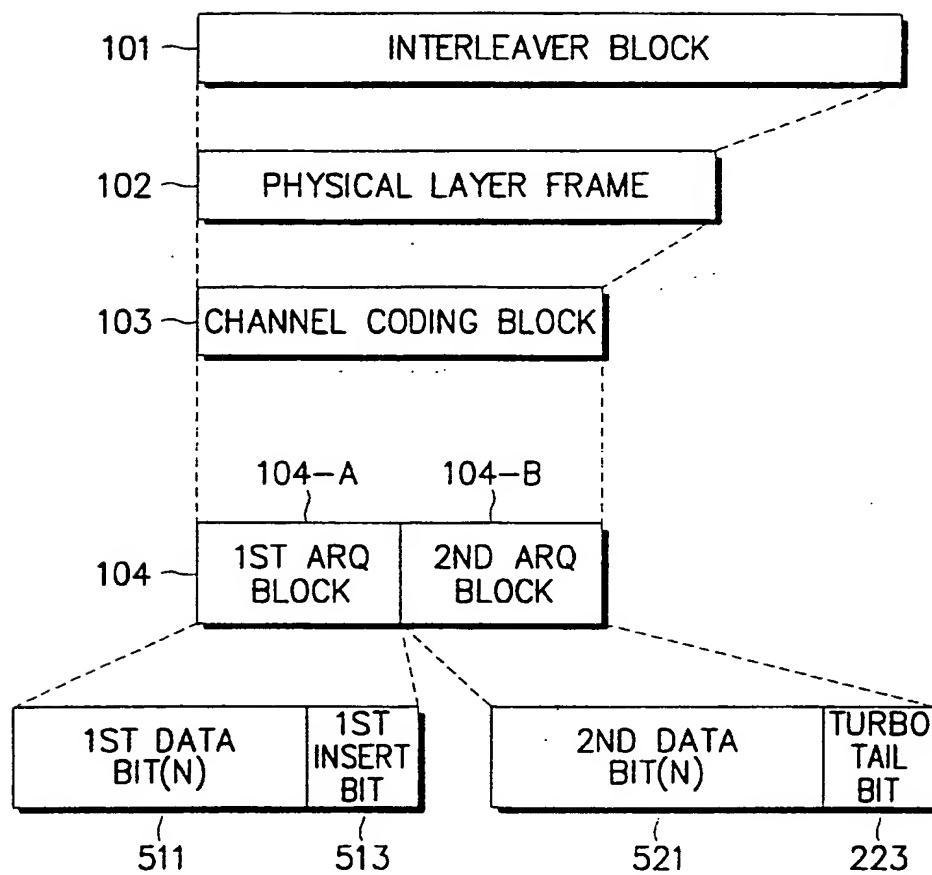


FIG. 5

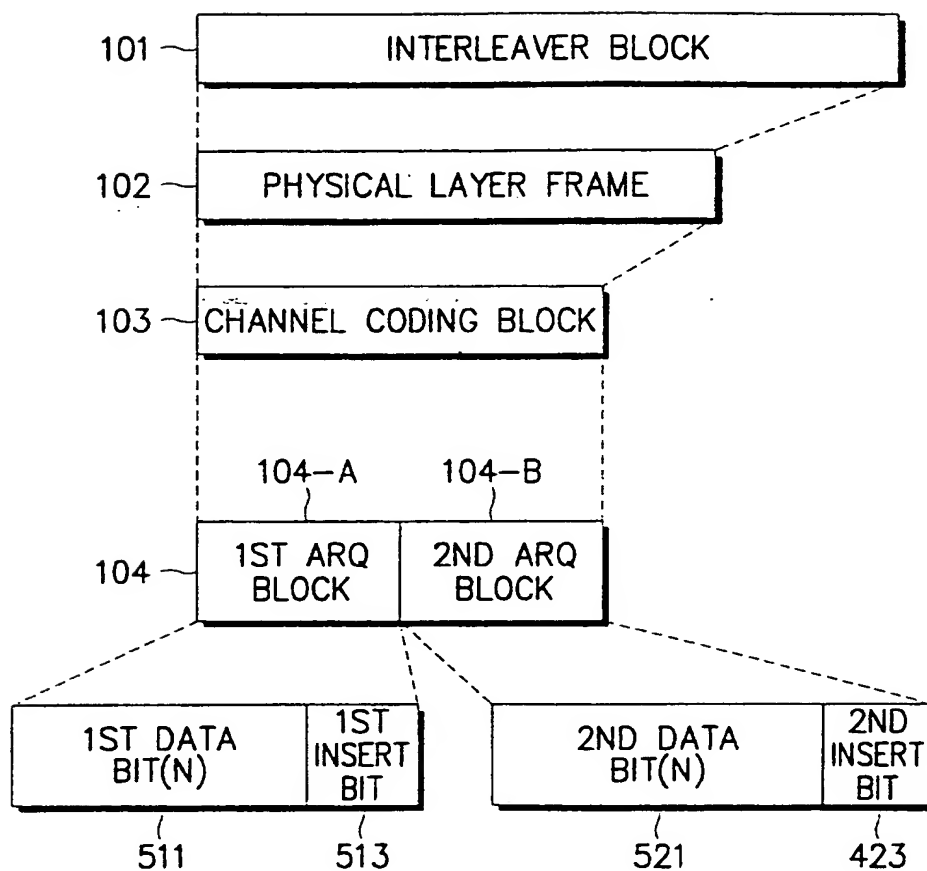


FIG. 6

7/16

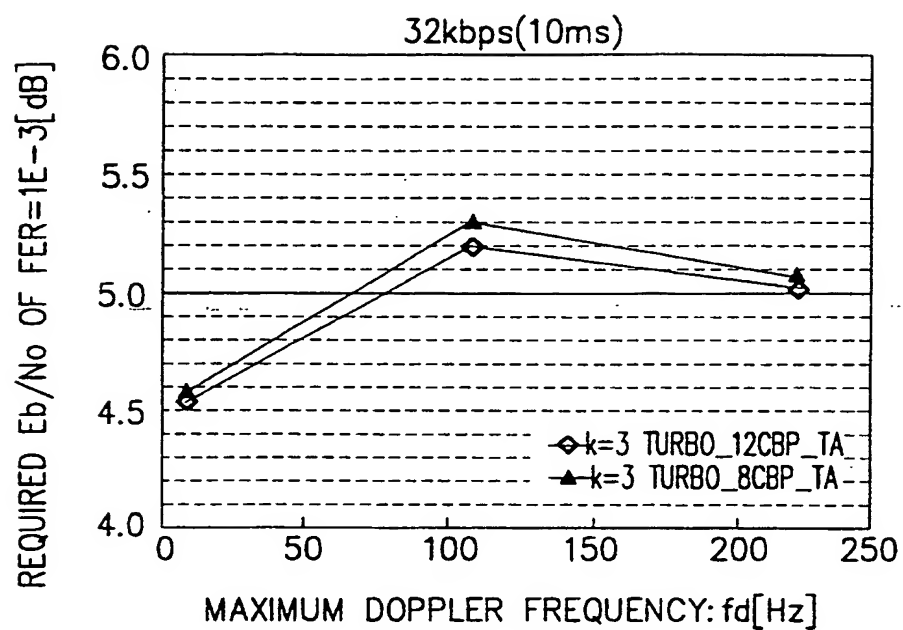


FIG. 7A

8/16

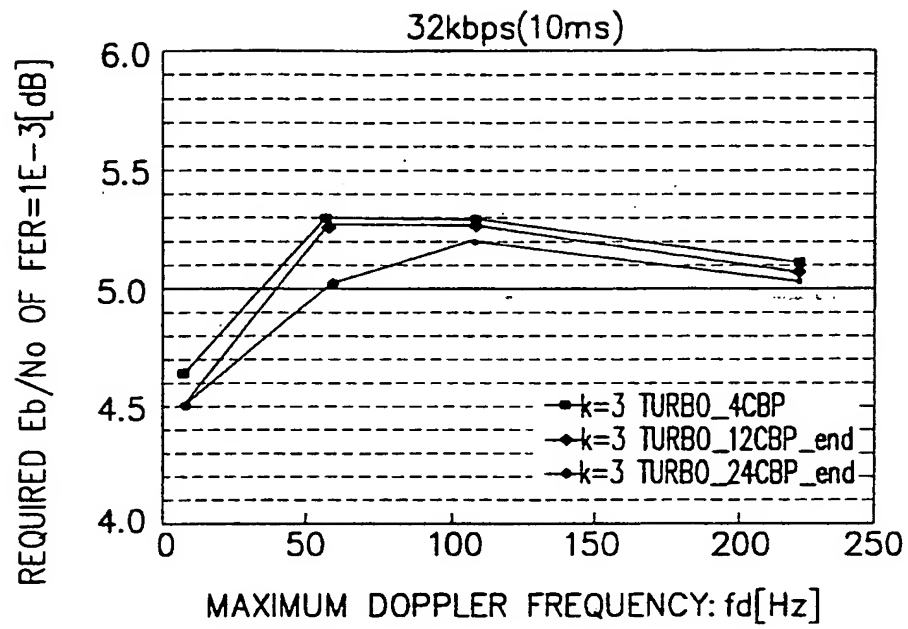



FIG. 7B







FIG. 10

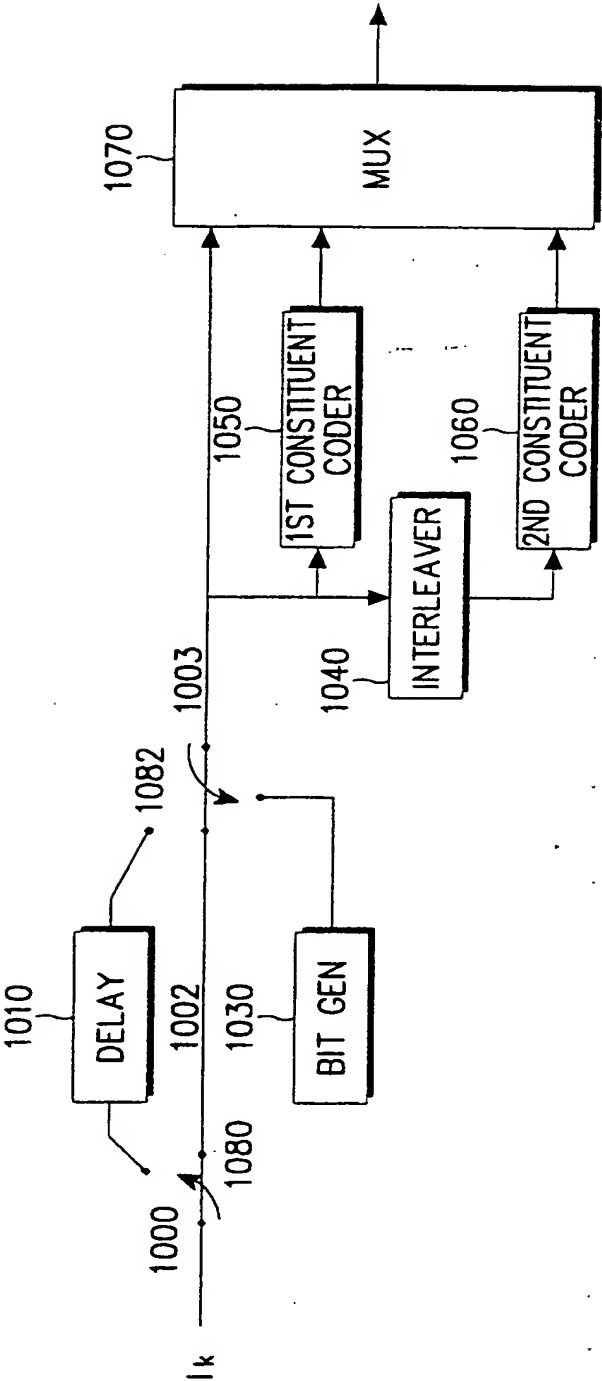

12/16

FIG. 11

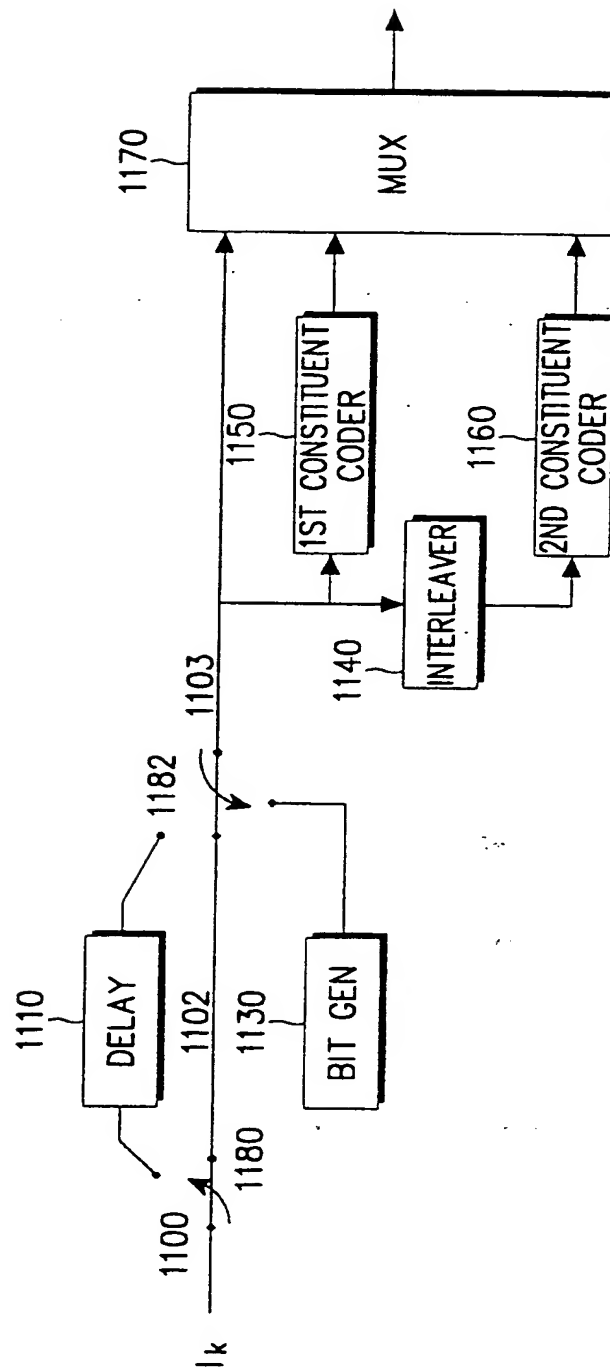






FIG. 14


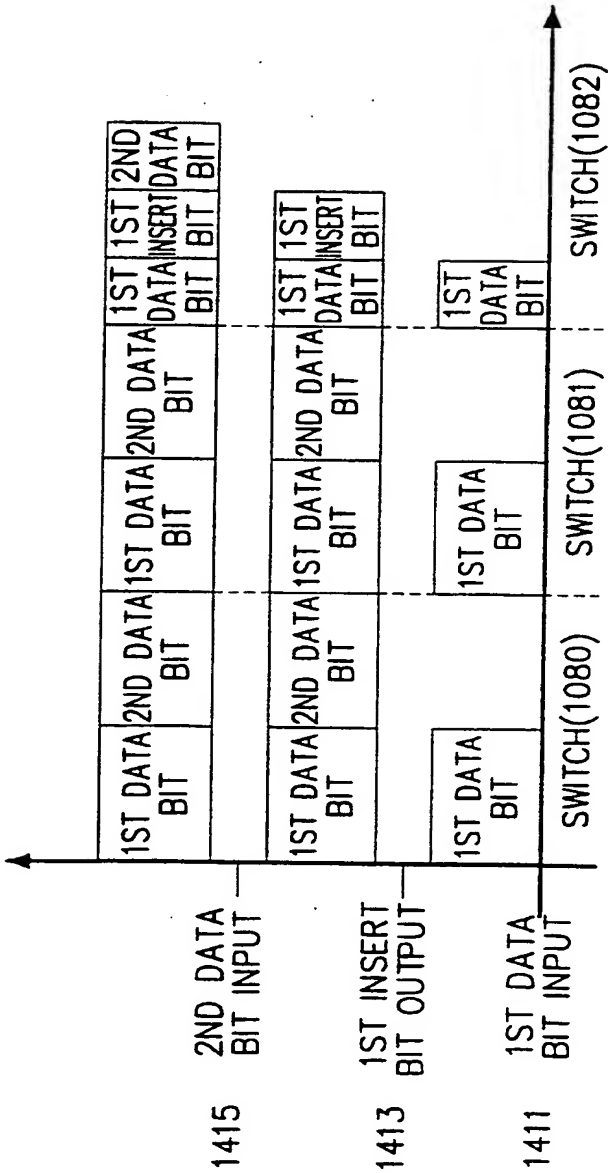


FIG. 15

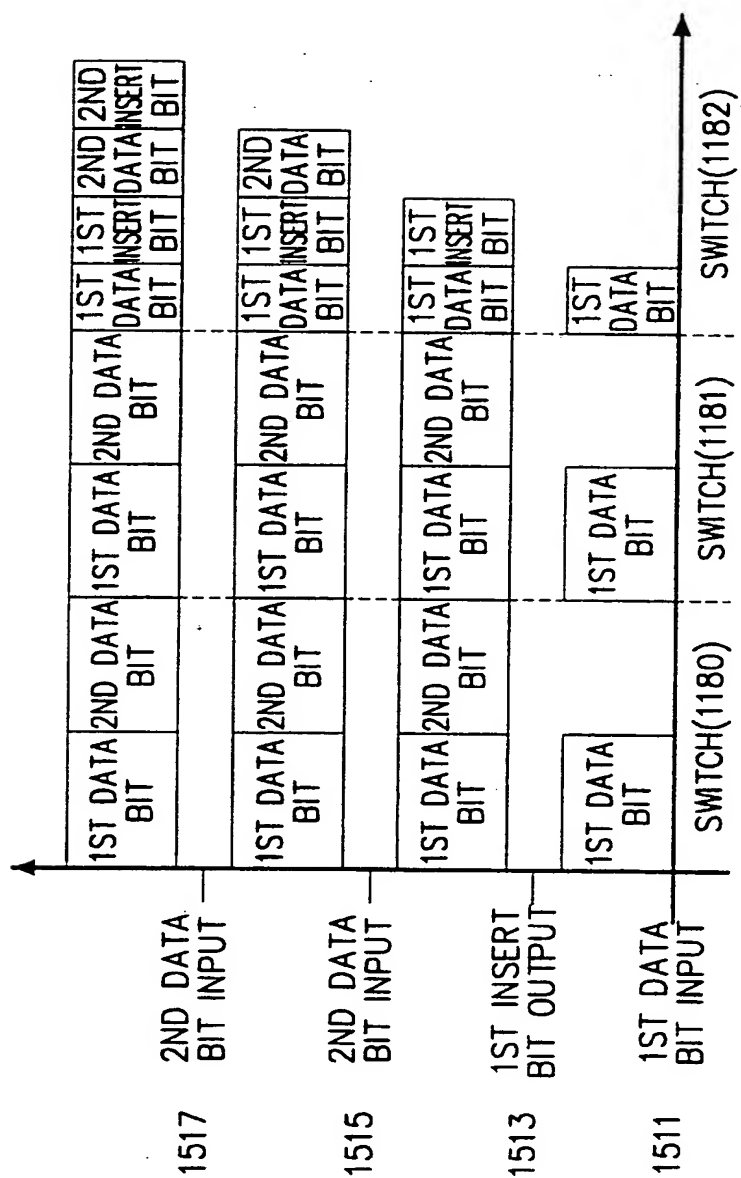

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H04B 7/26</b>		<b>A3</b>	(11) International Publication Number: <b>WO 00/13432</b>
			(43) International Publication Date: 9 March 2000 (09.03.00)
(21) International Application Number: PCT/KR99/00502		(81) Designated States: AU, CA, CN, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 1 September 1999 (01.09.99)			
(30) Priority Data: 1998/36383 1 September 1998 (01.09.98) KR		Published With international search report.	
(71) Applicant: SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-shi, Kyungki-do 442-370 (KR).		(88) Date of publication of the international search report: 10 August 2000 (10.08.00)	
(72) Inventors: KIM, Jae-Yoel; Sanpon 9-danji Apt. #960, Sanpon 2-dong, Kunpo-shi, Kyonggi-do 435-042 (KR). PARK, Chang-Soo; 72-2, Munjong-dong, Songpa-gu, Seoul 138-200 (KR).			
(74) Agent: LEE, Keon-Joo; Mihwa Building, 110-2, Myongryun-dong 4-ga, Chongro-gu, Seoul 110-524 (KR).			

(54) Title: DEVICE AND METHOD FOR TRANSMITTING SUBFRAME IN MOBILE COMMUNICATION SYSTEM

## (57) Abstract

A subframe data transmission device for a mobile communication system. A bit generator generates specific bits having a predetermined value. A bit inserter segments a received data bit stream into at least two subframes, and inserts the generated specific bits at locations where an error probability is higher in the respective subframes. A turbo coder codes the subframe data comprised of the data bit stream and the specific bits. The subframe is equal in size to an ARQ (Automatic Repeat Request) block, and the specific bits are inserted at a rear portion of the subframe. The bit inserter includes a delay for delaying the received data bit stream by the number of the specific bits to be inserted; and a selector for connecting, upon completion of receiving data bits for the subframe, the received data bits to the delay and applying an output of the bit generator to the turbo coder; and applying, when the specific bits are inserted, an output of the delay to the turbo coder.

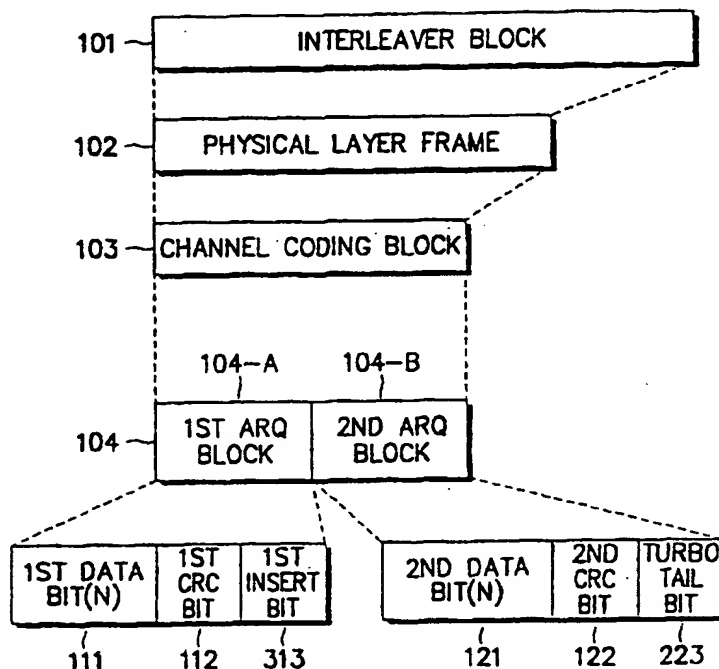

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						



# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 99/00502

## A. CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: H 04 B 7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: H 04 M 13/12; H 04 B 1/10, 7/26; H 04 Q 7/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 7-107530 A (NTT) 21 April 1995 (21.04.95), abstract.	1,4
A	US 5442646 A (CHADWICK et al.) 15 August 1995 (15.08.95), abstract; fig. 1-6; claims 1,16,26.	1,4
A	EP 0584766 A1 (NEC) 02 March 1994 (02.03.94), abstract; fig. 4; claims 1,2.	1,4
	----	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

28 April 2000 (28.04.00)

Date of mailing of the international search report

10 May 2000 (10.05.00)

Name and mailing address of the ISA/AT

Austrian Patent Office  
Kohlmarkt 8-10; A-1014 Vienna  
Facsimile No. 1/53424/200

Authorized officer

Badics

Telephone No. 1/53424/377

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.  
PCT/KR 99/00502

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
JP	A	7107530				none	
US	A	5442646	15-08-1995	CA	AA	2141653	02-08-1995
				EP	A2	666659	09-08-1995
				EP	A3	666659	17-09-1997
				JP	A2	8008857	12-01-1996
EP	A1	584766	02-03-1994	DE	C0	69326980	16-12-1999
EP	B1	584766	10-11-1999	JP	A2	6077910	18-03-1994
				JP	B2	2900719	02-06-1999
				US	A	5572681	05-11-1996